



ΕΛΛΗΝΙΚΗ ΔΗΜΟΚΡΑΤΙΑ
ΠΑΝΕΠΙΣΤΗΜΙΟ ΚΡΗΤΗΣ

Εισαγωγή στον Προγραμματισμό Introduction to Programming

Διάλεξη 9: Ροή Εισόδου/Εξόδου


Γ. Παπαγιαννάκης



Άδειες Χρήσης

- Το παρόν εκπαιδευτικό υλικό υπόκειται στην άδεια χρήσης **Creative Commons** και ειδικότερα

*Αναφορά Δημιουργού 3.0 - Μη εισαγόμενο Ελλάδα
(Attribution 3.0– Unported GR)*

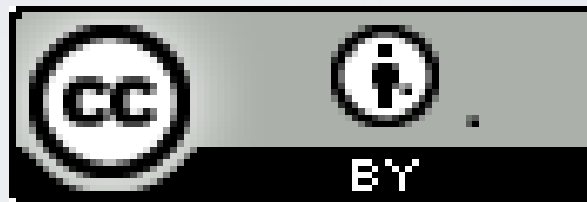

- Για εκπαιδευτικό υλικό, όπως εικόνες, που υπόκειται σε άλλου τύπου άδειας χρήσης, η άδεια χρήσης αναφέρεται ρητώς.

Χρηματοδότηση

- Το παρόν εκπαιδευτικό υλικό έχει αναπτυχθεί στα πλαίσια του εκπαιδευτικού έργου του διδάσκοντα.
- Το έργο «**Ανοικτά Ακαδημαϊκά Μαθήματα στο Πανεπιστήμιο Κρήτης**» έχει χρηματοδοτήσει μόνο τη αναδιαμόρφωση του εκπαιδευτικού υλικού.
- Το έργο υλοποιείται στο πλαίσιο του Επιχειρησιακού Προγράμματος «**Εκπαίδευση και Δια Βίου Μάθηση**» και συγχρηματοδοτείται από την Ευρωπαϊκή Ένωση (Ευρωπαϊκό Κοινωνικό Ταμείο) και από εθνικούς πόρους.



HY-150 Προγραμματισμός CS-150 Programming

Lecture 9: Input/Output streams

G. Papagiannakis




Abstract

- We get data from files, sensors, web connections, etc., which we want to analyze, print, graph, etc. Sometimes, we want to produce such data.
- In this lecture, we look at C++'s basic mechanisms for reading and writing streams of data.
- We also discuss an interesting – apparently trivial – problem: how to read an integer.


Overview

- Fundamental I/O concepts
- Files
 - Opening
 - Reading and writing streams
- I/O errors
- Reading a single integer

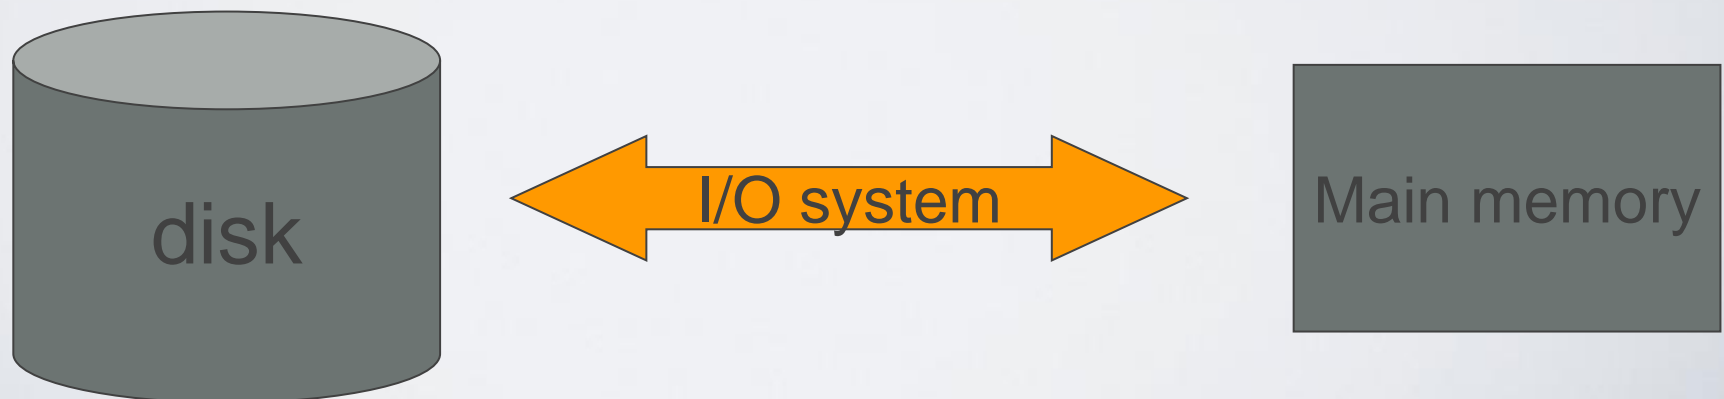

Input and Output


data source:

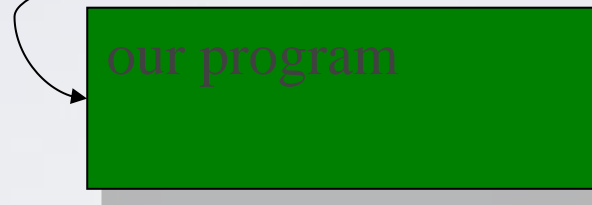

data destination:




The stream model

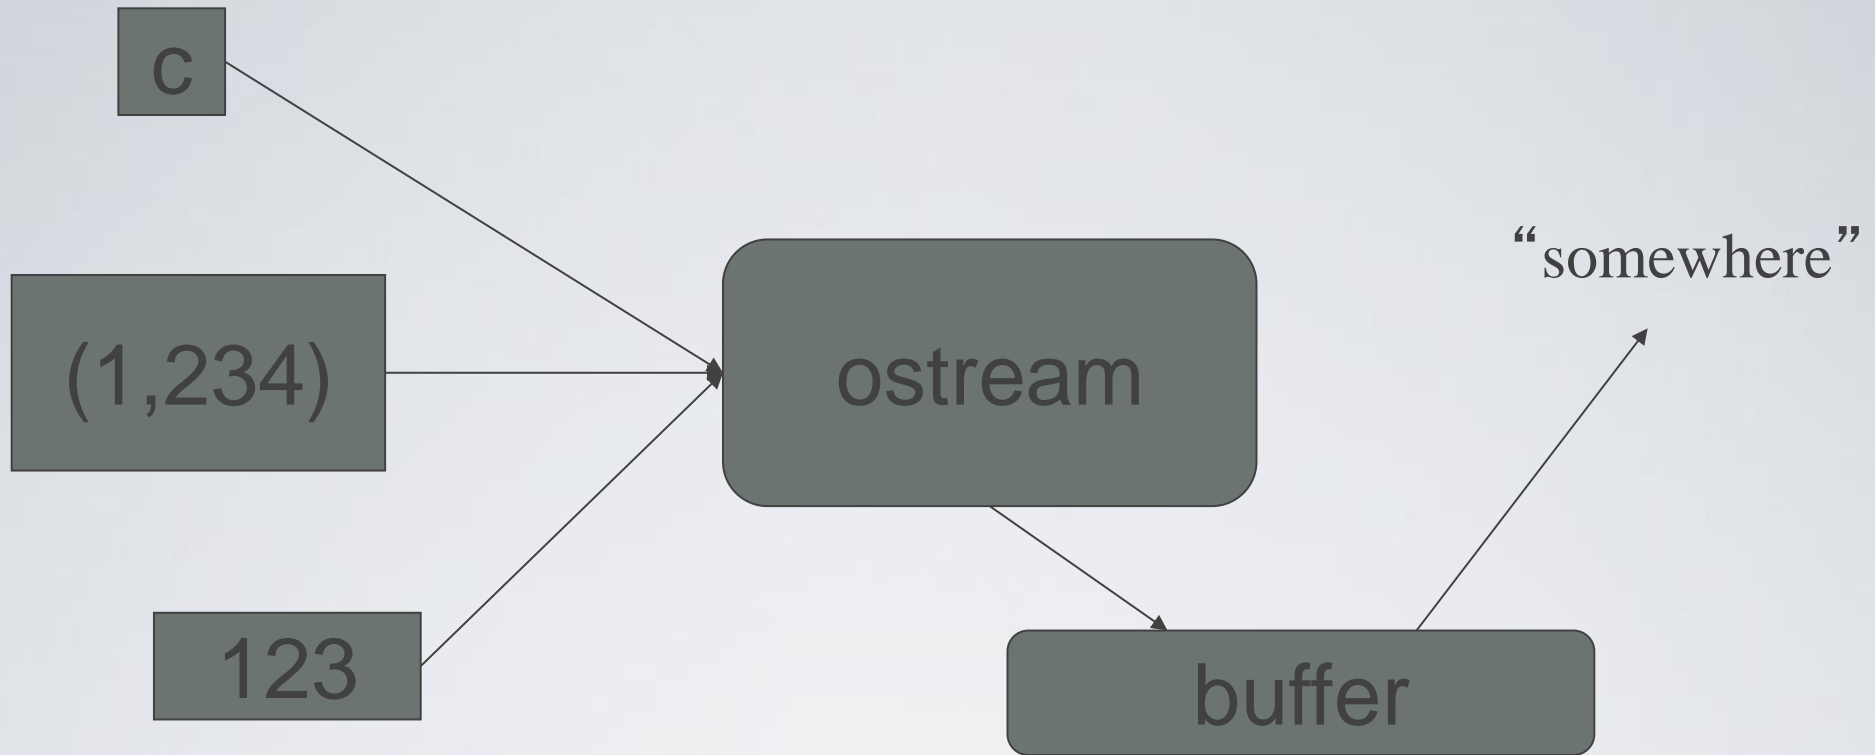

- **An ostream**

- turns values of various types into character sequences
- sends those characters somewhere
 - *E.g.*, console, file, main memory, another computer

The stream model

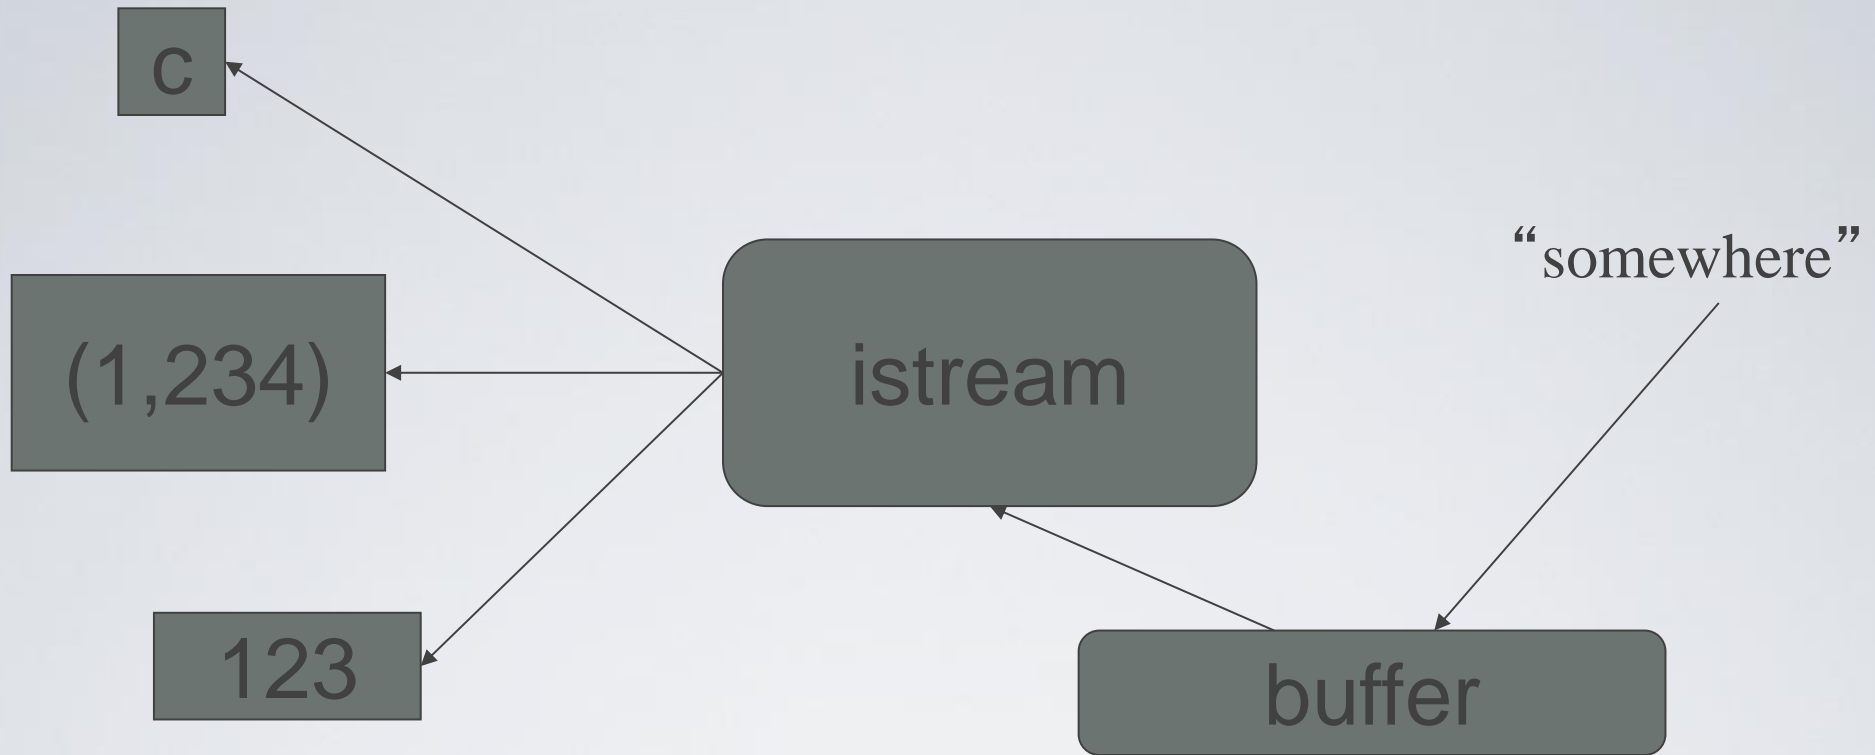

- **An `istream`**

- turns character sequences into values of various types
- gets those characters from somewhere
 - *E.g.*, console, file, main memory, another computer

The stream model

- Reading and writing
 - Of typed entities
 - << (output) and >> (input) plus other operations
 - Type safe
 - Formatted
 - Typically stored (entered, printed, etc.) as text
 - But not necessarily (see binary streams in chapter 11)
 - Extensible
 - You can define your own I/O operations for your own types
 - A stream can be attached to any I/O or storage device

Files

- We turn our computers on and off
 - The contents of our main memory is transient
- We like to keep our data
 - So we keep what we want to preserve on disks and similar permanent storage
- A file is a sequence of bytes stored in permanent storage
 - A file has a name
 - The data on a file has a format
- We can read/write a file if we know its name and format

A file


0: 1: 2:



- At the fundamental level, a file is a sequence of bytes numbered from 0 upwards
- Other notions can be supplied by programs that interpret a “file format”
 - For example, the 6 bytes "123.45" might be interpreted as the floating-point number 123.45

Files

- General model

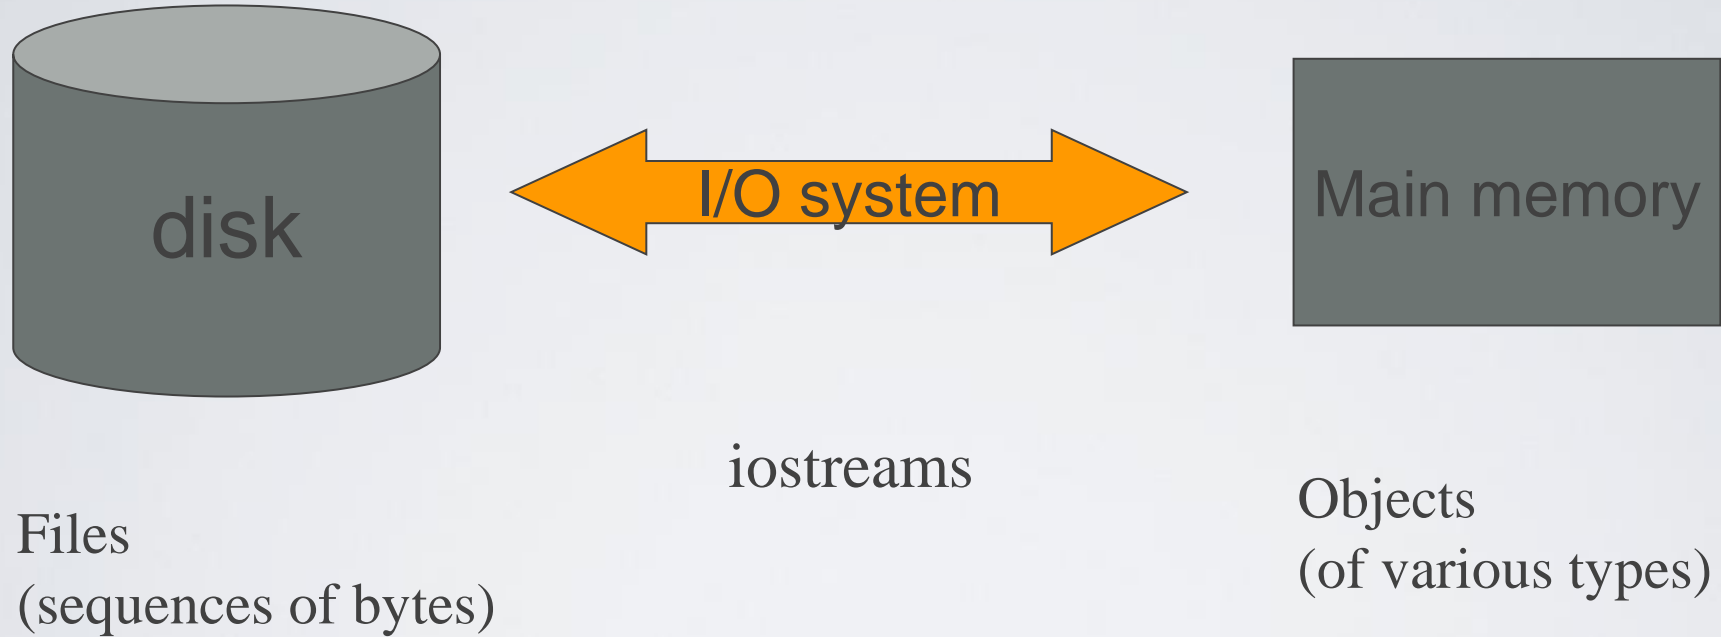

Files

- To read a file
 - We must know its name
 - We must open it (for reading)
 - Then we can read
 - Then we must close it
 - That is typically done implicitly
- To write a file
 - We must name it
 - We must open it (for writing)
 - Or create a new file of that name
 - Then we can write it
 - We must close it
 - That is typically done implicitly

Opening a file for reading

```
// ...  
int main()  
{  
    cout << "Please enter input file name: ";  
    string name;  
    cin >> name;  
    ifstream ist(name.c_str());    // ifstream is an "input stream from a file"  
                                   // c_str() gives a low-level ("system"  
                                   // or C-style) string from a C++ string  
  
                                   // defining an ifstream with a name string  
                                   // opens the file of that name for reading  
    if (!ist) error("can't open input file ", name);  
    // ...
```

Opening a file for writing

```
// ...  
cout << "Please enter name of output file: ";  
cin >> name;  
ofstream ofs(name.c_str()); // ofstream is an "output stream from a file"  
    // defining an ofstream with a name string  
    // opens the file with that name for writing  
if (!ofs) error("can't open output file ", name);  
// ...  
}
```


Remember

- Sometimes students want to read **to** a file or write **from** a file – this causes errors
- We read in **from** an input stream (ist >>)
- We write out **to** an output stream (ost <<)
- It's like a piece of paper:
 - Reading is getting information from the paper
 - Writing is putting information on the paper

Reading from a file

- Suppose a file contains a sequence of pairs representing hours and temperature readings

0 60.7

1 60.6

2 60.3

3 59.22

- The hours are numbered 0..23
- No further format is assumed
 - Maybe we can do better than that (but not just now)
- Termination
 - Reaching the end of file terminates the read
 - Anything unexpected in the file terminates the read
 - *E.g.*, `q`

Reading a file

```
struct Reading { // a temperature reading
    int hour; // hour after midnight [0:23]
    double temperature;
    Reading(int h, double t) :hour(h), temperature(t) { }
};

vector<Reading> temps; // create a vector to store the readings

int hour;
double temperature;
while (ist >> hour >> temperature) { // read
    if (hour < 0 || 23 <hour) error("hour out of range"); // check
    temps.push_back( Reading(hour,temperature) ); // store
}
```

I/O error handling

- Sources of errors
 - Human mistakes
 - Files that fail to meet specifications
 - Specifications that fail to match reality
 - Programmer errors
 - Etc.
- `iostream` reduces all errors to one of four states
 - `good()` *// the operation succeeded*
 - `eof()` *// we hit the end of input (“end of file”)*
 - `fail()` *// something unexpected happened*
 - `bad()` *// something unexpected and serious happened*

Sample integer read “failure”

- Ended by “terminator character”
 - 1 2 3 4 5 *
 - State is **fail()**
- Ended by format error
 - 1 2 3 4 5.6
 - State is **fail()**
- Ended by “end of file”
 - 1 2 3 4 5 end of file
 - 1 2 3 4 5 Control-Z (Windows)
 - 1 2 3 4 5 Control-D (Unix)
 - State is **eof()**
- Something really bad
 - Disk format error
 - State is **bad()**

I/O error handling

```
void fill_vector(istream& ist, vector<int>& v, char terminator)
{
    // read integers from ist into v until we reach eof() or terminator
    int i = 0;
    while (ist >> i) v.push_back(i);    // read and store in v until "some failure"
    if (ist.eof()) return;              // fine: we found the end of file
    if (ist.bad()) error("ist is bad"); // stream corrupted; let's get out of here!

    if (ist.fail()) { // clean up the mess as best we can and report the problem
        ist.clear(); // clear stream state, so that we can look for terminator
        char c;
        ist>>c;      // read a character, hopefully terminator
        if (c != terminator) { // unexpected character
            ist.unget(); // put that character back
            ist.clear(ios_base::failbit); // set the state back to fail()
        }
    }
}
```

Throw an exception for `bad()`

// How to make `ist` throw if it goes `bad`:

```
ist.exceptions(ist.exceptions()|ios_base::badbit);
```

// can be read as

// “set `ist`’s exception mask to whatever it was plus `badbit`”

// or as “throw an exception if the stream goes `bad`”

Given that, we can simplify our input loops by no longer checking for **`bad`**

Simplified input loop

```
void fill_vector(istream& ist, vector<int>& v, char terminator)
{
    // read integers from ist into v until we reach eof() or terminator
    int i = 0;
    while (ist >> i) v.push_back(i);
    if (ist.eof()) return; // fine: we found the end of file

    // not good() and not bad() and not eof(), ist must be fail()
    ist.clear(); // clear stream state
    char c;
    ist>>c; // read a character, hopefully terminator
    if (c != terminator) { // ouch: not the terminator, so we must fail
        ist.unget(); // maybe my caller can use that character
        ist.clear(ios_base::failbit); // set the state back to fail()
    }
}
```


Reading a single value

// first simple and flawed attempt:

```
cout << "Please enter an integer in the range 1 to 10 (inclusive):\n";
int n = 0;
while (cin>>n) {                                // read
    if (1<=n && n<=10) break;                    // check range
    cout << "Sorry, "
        << n
        << " is not in the [1:10] range; please try again\n";
}
```

- Three kinds of problems are possible
 - the user types an out-of-range value
 - getting no value (end of file)
 - the user types something of the wrong type (here, not an integer)

Reading a single value

- What do we want to do in those three cases?
 - handle the problem in the code doing the read?
 - throw an exception to let someone else handle the problem (potentially terminating the program)?
 - ignore the problem?
- Reading a single value
 - Is something we often do many times
 - We want a solution that's very simple to use

Handle everything: **What a mess!**

```
cout << "Please enter an integer in the range 1 to 10 (inclusive):\n";
int n = 0;
while (n==0) {
    cin >> n;
    if (cin) { // we got an integer; now check it:
        if (1<=n && n<=10) break;
        cout << "Sorry, " << n << " is not in the [1:10] range; please try again\n";
    }
    else if (cin.fail()) { // we found something that wasn't an integer
        cin.clear(); // we'd like to look at the characters
        cout << "Sorry, that was not a number; please try again\n";
        char ch;
        while (cin>>ch && !isdigit(ch)) ; // throw away non-digits
        if (!cin) error("no input"); // we didn't find a digit: give up
        cin.unget(); // put the digit back, so that we can read the number
    }
    else
        error("no input"); // eof or bad: give up
}
// if we get here n is in [1:10]
```

The mess: trying to do everything at once

- Problem: We have all mixed together
 - reading values
 - prompting the user for input
 - writing error messages
 - skipping past “bad” input characters
 - testing the input against a range
- Solution: Split it up into logically separate parts

What do we want?

- What logical parts do we want?
 - **int get_int(int low, int high);** *// read an int in [low..high] from cin*
 - **int get_int();** *// read an int from cin*
// so that we can check the range int
 - **void skip_to_int();** *// we found some “garbage” character*
// so skip until we find an int
- Separate functions that do the logically separate actions

Skip “garbage”

```
void skip_to_int()
{
    if (cin.fail()) {           // we found something that wasn't an integer
        cin.clear();          // we'd like to look at the characters
        char ch;
        while (cin>>ch) {      // throw away non-digits
            if (isdigit(ch)) {
                cin.unget();    // put the digit back,
                               // so that we can read the number
                return;
            }
        }
    }
    error("no input");        // eof or bad: give up
}
```

Get (any) integer

```
int get_int()
{
    int n = 0;
    while (true) {
        if (cin >> n) return n;
        cout << "Sorry, that was not a number; please try again\n";
        skip_to_int();
    }
}
```

Get integer in range

```
int get_int(int low, int high)
{
    cout << "Please enter an integer in the range "
         << low << " to " << high << " (inclusive):\n";
    while (true) {
        int n = get_int();
        if (low<=n && n<=high) return n;
        cout << "Sorry, "
             << n << " is not in the [" << low << ':' << high
             << "] range; please try again\n";
    }
}
```


Use

```
int n = get_int(1,10);  
cout << "n: " << n << endl;
```

```
int m = get_int(2,300);  
cout << "m: " << m << endl;
```

- Problem:
 - The “dialog” is built into the read operations

What do we really want?

// parameterize by integer range and "dialog"

```
int strength = get_int(1, 10,  
                      "enter strength",  
                      "Not in range, try again");  
cout << "strength: " << strength << endl;  
  
int altitude = get_int(0, 50000,  
                      "please enter altitude in feet",  
                      "Not in range, please try again");  
cout << "altitude: " << altitude << "ft. above sea level\n";
```

- That's often the really important question
- Ask it repeatedly during software development
- As you learn more about a problem and its solution, your answers improve

Parameterize

```
int get_int(int low, int high, const string& greeting, const string& sorry)
{
    cout << greeting << ": [" << low << ':' << high << "]\n";
    while (true) {
        int n = get_int();
        if (low<=n && n<=high) return n;
        cout << sorry << ": [" << low << ':' << high << "]\n";
    }
}
```

- Incomplete parameterization: **get_int()** still “blabbers”
 - “utility functions” should not produce their own error messages
 - Serious library functions do not produce error messages at all
 - They throw exceptions (possibly containing an error message)

User-defined output: operator<<()

- Usually trivial

```
ostream& operator<<(ostream& os, const Date& d)
```

```
{
```

```
    return os << '(' << d.year()
```

```
        << ',' << d.month()
```

```
        << ',' << d.day() << ')';
```

```
}
```

- We often use several different ways of outputting a value
 - Tastes for output layout and detail vary

Use

```
void do_some_printing(Date d1, Date d2)
{
    cout << d1;          // means operator<<(cout,d1) ;

    cout << d1 << d2;

        // means (cout << d1) << d2;
            // means (operator<<(cout,d1)) << d2;
                // means operator<<((operator<<(cout,d1)), d2) ;
}
```

User-defined input: operator>>()

```
istream& operator>>(istream& is, Date& dd)
    // Read date in format: ( year , month , day )
{
    int y, d, m;
    char ch1, ch2, ch3, ch4;
    is >> ch1 >> y >> ch2 >> m >> ch3 >> d >> ch4;
    if (!is) return is;          // we didn't get our values, so just leave
    if (ch1!='(' || ch2!=',' || ch3!=',' || ch4!=')') {          // oops: format error
        is.clear(ios_base::failbit); // something wrong: set state to fail()
        return is;                  // and leave
    }
    dd = Date(y,Month(m),d);        // update dd
    return is;                      // and leave with is in the good() state
}
```

Next Lecture

Customizing input and output (chapter 11)

Acknowledgements

Bjarne Stroustrup

Programming -- Principles and Practice Using C++

<http://www.stroustrup.com/Programming/>

Thank you!

